

EMC Test Report

Client Name : Dongguan Kangya Technology Co., Ltd.
Address : Room 501, Building 2, No. 7, Longtian Road, Qinghutou,
Tangxia Town, Dongguan City, Guangdong Province
Product Name : Terahertz blower
Date : Jun. 10, 2022



Shenzhen Anbotek Compliance Laboratory Limited



Contents

1. General Information	5
1.1. Client Information	5
1.2. Description of Device (EUT)	5
1.3. Auxiliary Equipment Used During Test	5
1.4. Description of Test Mode	6
1.5. Test Summary	6
1.6. Test Equipment List	7
1.7. Description of Test Facility	9
1.8. EMS Performance Criteria	10
2. Power Line Conducted Emission Test	11
2.1. Test Standard and Limit	11
2.2. Test Setup	11
2.3. EUT Configuration on Measurement	11
2.4. Operating Condition of EUT	11
2.5. Test Procedure	12
2.6. Test Results	12
3. Disturbance Power Test	15
3.1. Test Standard and Limit	15
3.2. Test Setup	15
3.3. EUT Configuration on Measurement	15
3.4. Operating Condition of EUT	15
3.5. Test Procedure	16
3.6. Test Results	16
4. Harmonic Current Emission Test	18
4.1. Test Standard	18
4.2. Test Setup	18
4.3. Operating Condition of EUT	18
4.4. Test Results	18
5. Voltage Fluctuations & Flicker Test	21
5.1. Test Standard	21
5.2. Test Setup	21
5.3. Operating Condition of EUT	21
5.4. Test Results	21
6. Electrostatic Discharge Immunity Test	23
6.1. Test Standard and Level	23
6.2. Test Setup	23
6.3. EUT Configuration on Measurement	23
6.4. Operating Condition of EUT	23
6.5. Test Procedure	24

6.6. Test Results	24
7. Electrical Fast Transient/Burst Immunity Test.....	26
7.1. Test Standard and Level	26
7.2. Test Setup	26
7.3. EUT Configuration on Measurement	26
7.4. Operating Condition of EUT	26
7.5. Test Procedure	27
7.6. Test Results	27
8. Surge Immunity Test.....	29
8.1. Test Standard and Level	29
8.2. Test Setup	29
8.3. EUT Configuration on Measurement	29
8.4. Operating Condition of EUT	29
8.5. Test Procedure	30
8.6. Test Results	30
9. Injected Currents Susceptibility Test.....	32
9.1. Test Standard and Level	32
9.2. Test Setup	32
9.3. EUT Configuration	32
9.4. Operating Condition of EUT	32
9.5. Test Procedure	33
9.6. Test Results	33
10. Voltage Dips And Interruptions Test.....	35
10.1. Test Standard and Level	35
10.2. Test Setup	35
10.3. EUT Configuration on Measurement	35
10.4. Operating Condition of EUT	36
10.5. Test Procedure	36
10.6. Test Results	36
APPENDIX I -- TEST SETUP PHOTOGRAPH.....	38
APPENDIX II -- Photo documentation.....	42



TEST REPORT

Applicant : Dongguan Kangya Technology Co., Ltd.
Manufacturer : Dongguan Kangya Technology Co., Ltd.
Product Name : Terahertz blower
Model No. : FKY00098, FKY
Trade Mark : FKY
Rating(s) : 220-240V~, 50/60Hz, 1000W

**Test Standard(s) : EN IEC 55014-1: 2021;
EN IEC 61000-3-2: 2019+A1: 2021;
EN 61000-3-3: 2013+A1:2021;
EN IEC 55014-2: 2021
(IEC 61000-4-2; IEC 61000-4-4;
IEC 61000-4-5; IEC 61000-4-6; IEC 61000-4-11)**

The device described above is tested by Shenzhen Anbotek Compliance Laboratory Limited To determine the maximum emission levels emanating from the device and the severe levels of the device can endure and its performance criterion. This report shows the EUT to be technically compliant with the EN IEC 55014-1, EN IEC 61000-3-2, EN 61000-3-3 and EN IEC 55014-2 requirements. The test results are contained in this report and Shenzhen Anbotek Compliance Laboratory Limited is assumed full responsibility for the accuracy and completeness of these tests.

This report applies to above tested sample only and shall not be reproduced in part without written approval of Shenzhen Anbotek Compliance Laboratory Limited

Date of Receipt: May 17, 2022

Date of Test: May 17~May 24, 2022

Prepared By:



(Yee Huang)

Approved & Authorized Signer:



(KingKong Jin)

1. General Information

1.1. Client Information

Applicant	:	Dongguan Kangya Technology Co., Ltd.
Address	:	Room 501, Building 2, No. 7, Longtian Road, Qinghutou, Tangxia Town, Dongguan City, Guangdong Province
Manufacturer	:	Dongguan Kangya Technology Co., Ltd.
Address	:	Room 501, Building 2, No. 7, Longtian Road, Qinghutou, Tangxia Town, Dongguan City, Guangdong Province
Factory	:	Dongguan Kangya Technology Co., Ltd.
Address	:	Room 501, Building 2, No. 7, Longtian Road, Qinghutou, Tangxia Town, Dongguan City, Guangdong Province

1.2. Description of Device (EUT)

Product Name	:	Terahertz blower
Model No.	:	FKY00098, FKY (Note: All samples are the same except the model number & appearance, so we prepare "FKY00098" for test only.)
Trade Mark	:	FKY
Test Power Supply	:	AC 230V, 50Hz
Test Sample No.	:	1-1-1
Product Description	:	Adapter: N/A
Remark: (1) For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.		

1.3. Auxiliary Equipment Used During Test


N.A.	:	
------	---	--



1.4. Description of Test Mode

Pretest Mode	Description
Mode 1	On

For Mode 1 Block Diagram of Test Setup



1.5. Test Summary

Test Items	Test Mode	Status
Power Line Conducted Emission Test (150kHz To 30MHz)	Mode 1	P
Disturbance Power Test (30MHz To 300MHz)	Mode 1	P
Radiated Emission Test (30MHz To 1000MHz)	/	N
Harmonic Current Test	Mode 1	P
Voltage Fluctuations and Flicker Test	Mode 1	P
Electrostatic Discharge immunity Test	Mode 1	P
RF Field Strength susceptibility Test	/	N
Electrical Fast Transient/Burst Immunity Test	Mode 1	P
Surge Immunity Test	Mode 1	P
Injected Currents Susceptibility Test	Mode 1	P
Voltage Dips and Interruptions Test	Mode 1	P
P) Indicates "PASS".		
N) Indicates "Not applicable".		

Note: The EUT is Category II Products, No Requirement for R/S Testing



1.6. Test Equipment List**Conducted Emission Measurement**

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	L.I.S.N. Artificial Mains Network	Rohde & Schwarz	ENV216	100055	Oct. 22, 2021	1 Year
2.	Three Phase V-type Artificial Power Network	CYBERTEK	EM5040DT	E215040D T001	Jul. 05, 2021	1 Year
3.	EMI Test Receiver	Rohde & Schwarz	ESCI	100627	Oct. 22, 2021	1 Year
4.	RF Switching Unit	Compliance Direction	RSU-M2	38303	Oct. 22, 2021	1 Year
5.	Software Name EZ-EMC	Ferrari Technology	ANB-03A	N/A	N/A	N/A

Power Clamp Measurement

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Absorbing Clamp	FCC	F-201-23MM	08166	Oct. 22, 2021	1 Year
2.	EMI Test Receiver	Rohde & Schwarz	ESCI	100627	Oct. 22, 2021	1 Year
3.	RF Switching Unit	Compliance Direction	RSU-M2	38303	Oct. 22, 2021	1 Year
4.	Software Name EZ-EMC	Ferrari Technology	ANB-03A	N/A	N/A	N/A

Harmonic and Flicker Measurement

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Programmable AC Power source	IVYTECH	APS-5005A	632734	Oct. 22, 2021	1 Year
2.	Harmonic and Flicker Analyzer	EMC-PARTNER	HMONICS 1000-1P	164	Oct. 22, 2021	1 Year
3.	Harmonics-1000	N/A	Ed.3.0+4.0	N.A	N/A	N/A

Electrostatic Discharge Measurement

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	ESD Simulators	emtest	ESD NX30.1	11936	Mar. 25, 2022	1 Year

Electrical Fast Transient/Burst Immunity Measurement

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Surge Generator	TESEQ	NSG 3060	1480	Oct. 22, 2021	1 Year
2.	CDN	TESEQ	CDN 3061	1408	Oct. 22, 2021	1 Year
3.	EFT-Clamp	PRIMA	EFT-Clamp	/	Oct. 22, 2021	1 Year

Surge Measurement

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Combined Wave Lightning Surge Simulator	3Ctest	CCS600	ES3771702	Jul. 05, 2021	1 Year
2.	Three Phase Power Coupling Network	3Ctest	SEPN69100 T	ES0801757	Jul. 05, 2021	1 Year
3.	Telecom port surge generator	PMI	TW101	190411	May 13, 2022	1 Year

Injected Currents Susceptibility Measurement

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	C/S Conducted Immunity Test System	FRANKONIA	CIT-10	126A1196/20 12	Oct. 22, 2021	1 Year
2.	CDN	FRANKONIA	CDN - M2+ M3	A2210178/20 12	Oct. 22, 2021	1 Year
3.	6dB Attenuator	FRANKONIA	DAM 26W	1172202	Oct. 22, 2021	1 Year
4.	CIT-10	FRANKONIA	Version1.1.7	N/A	N/A	N/A
5.	EM-Clamp	FRANKONIA	EMCL-20	18101728-01 03	May 17,2022	1 Year

Voltage Dips and Interruptions Measurement

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	CYCLE SAG Simulator	PRIMA	DRP61011A G	PR12046234	Oct. 22, 2021	1 Year



1.7. Description of Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

FCC-Registration No.: 184111

Shenzhen Anbotek Compliance Laboratory Limited, EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration No. 184111.

ISED-Registration No.: 8058A

Shenzhen Anbotek Compliance Laboratory Limited, EMC Laboratory has been registered and fully described in a report filed with the (ISED) Innovation, Science and Economic Development Canada. The acceptance letter from the ISED is maintained in our files. Registration 8058A.

Test Location

Shenzhen Anbotek Compliance Laboratory Limited.

1/F, Building D, Sogood Science and Technology Park, Sanwei community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.518128



1.8. EMS Performance Criteria

- √ A: Normal performance within the specification limits
- √ B: Temporary degradation or loss of function or performance which is self-recoverable
- √ C: Temporary degradation or loss of function or performance which requires operator intervention or system reset
- √ D: Degradation or loss of function which is not recoverable due to damage of equipment (components) or software, or loss of data

Note: The manufacturer's specification may define effects on the EUT which may be considered insignificant, and therefore acceptable.

This classification may be used as a guide in formulating performance criteria, by committees responsible for generic, product and product-family standards, or as a framework for the agreement on performance criteria between the manufacturer and the purchaser, for example where no suitable generic, product or product-family standard exists.



2. Power Line Conducted Emission Test

2.1. Test Standard and Limit

Test Standard	EN IEC 55014-1
---------------	----------------


Limits for conducted emissions

Test Limit	Frequency (MHz)	At mains terminals (dB μ V)	
		Quasi-peak Level	Average Level
	0.15 ~ 0.50	66.0 ~ 56.0*	59.0 ~ 46.0*
	0.50 ~ 5.00	56.0	46.0
	5.00 ~ 30.00	60.0	50.0

Remark: (1) The lower limit shall apply at the transition frequencies.

(2) The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.50MHz.

2.2. Test Setup

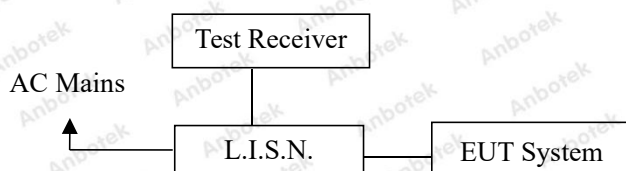

2.3. EUT Configuration on Measurement

The following equipments are installed on Conducted Emission Measurement to meet EN IEC 55014-1 requirements and operating in a manner which tends to maximize its emission characteristics in a normal application.

2.4. Operating Condition of EUT

2.4.1. Setup the EUT as shown in Section 2.2.

2.4.2. Turn on the power of all equipments.

2.4.3. Let the EUT work in test mode and measure it.

2.5. Test Procedure

The EUT is put on the plane 0.8 m high above the ground by insulating support and connected to the AC mains through Line Impedance Stability Network(L.I.S.N). This provided a 50ohm coupling impedance for the tested equipments. Both sides of AC line are investigated to find out the maximum conducted emission according to the EN IEC 55014-1 regulations during conducted emission measurement.

The bandwidth of the field strength meter (R&S Test Receiver ESCI) is set at 9kHz in 150kHz~30MHz.

The frequency range from 150kHz to 30MHz is investigated for AC mains.

All the test results are listed in Section 2.6.

2.6. Test Results


PASS

The test curves are shown in the following pages.



Conducted Emission Test Data

Test Site: 1# Shielded Room
 Test Specification: AC 230V, 50Hz
 Comment: Live Line
 Temp.: 23.9°C Hum.: 47%

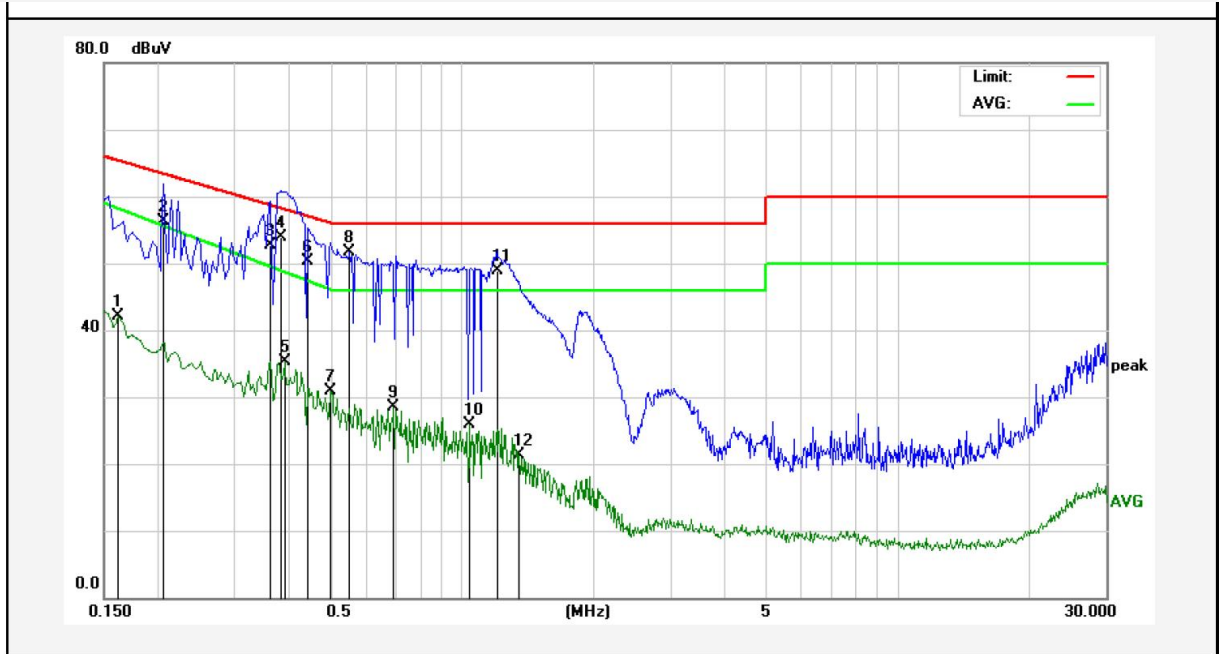


No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit (dBuV)	Over Limit (dB)	Detector	Remark
1	0.1620	41.90	0.12	42.02	58.16	-16.14	AVG	
2	0.2060	56.20	0.12	56.32	63.36	-7.04	QP	
3	0.3620	52.59	0.12	52.71	58.68	-5.97	QP	
4	0.3820	53.89	0.11	54.00	58.23	-4.23	QP	
5	0.3899	35.18	0.11	35.29	48.68	-13.39	AVG	
6	0.4420	50.12	0.13	50.25	57.02	-6.77	QP	
7	0.4980	30.80	0.15	30.95	46.04	-15.09	AVG	
8	0.5500	51.47	0.15	51.62	56.00	-4.38	QP	
9	0.6940	28.33	0.15	28.48	46.00	-17.52	AVG	
10	1.0380	25.84	0.15	25.99	46.00	-20.01	AVG	
11	1.1980	48.79	0.14	48.93	56.00	-7.07	QP	
12	1.3460	21.08	0.14	21.22	46.00	-24.78	AVG	

Note: Result=Reading+Factor Over Limit=Result-Limit

Conducted Emission Test Data

Test Site: 1# Shielded Room
 Test Specification: AC 230V, 50Hz
 Comment: Neutral Line
 Temp.: 23.9°C Hum.: 47%

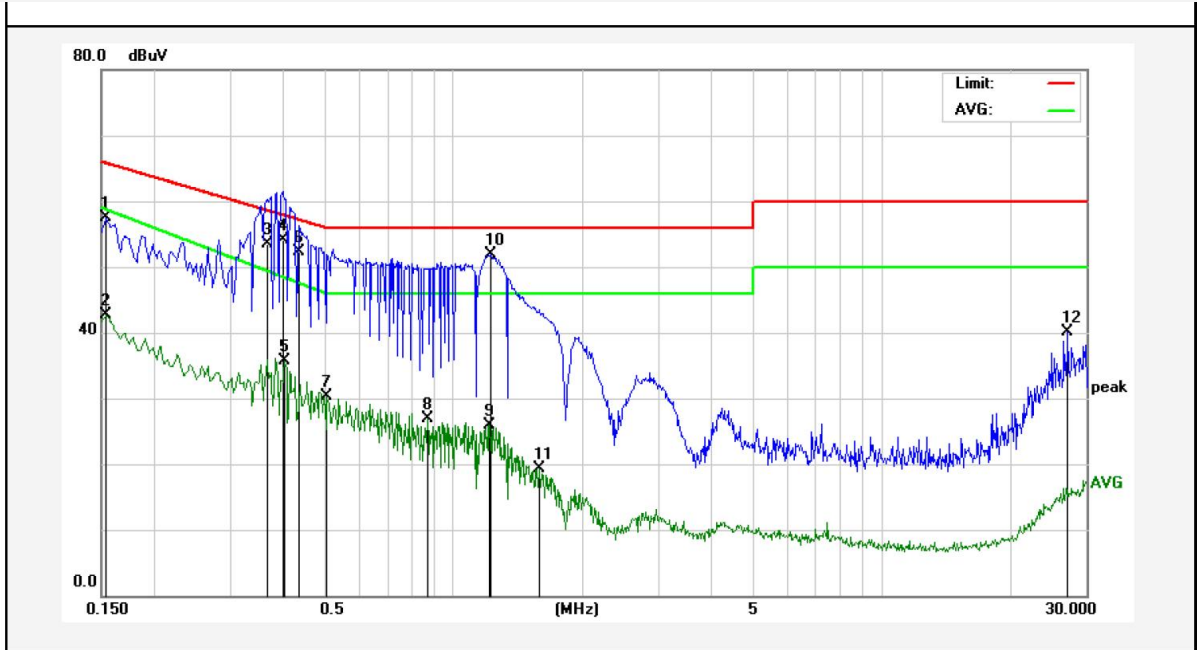

No.	Freq. (MHz)	Reading (dBUV)	Factor (dB)	Result (dBUV)	Limit (dBUV)	Over Limit (dB)	Detector	Remark
1	0.1539	57.38	0.12	57.50	65.78	-8.28	QP	
2	0.1539	42.62	0.12	42.74	58.72	-15.98	AVG	
3	0.3660	53.38	0.12	53.50	58.59	-5.09	QP	
4	0.3980	53.92	0.11	54.03	57.89	-3.86	QP	
5	0.4020	35.62	0.11	35.73	48.35	-12.62	AVG	
6	0.4351	52.24	0.12	52.36	57.15	-4.79	QP	
7	0.5060	30.21	0.15	30.36	46.00	-15.64	AVG	
8	0.8700	26.77	0.15	26.92	46.00	-19.08	AVG	
9	1.2140	25.76	0.14	25.90	46.00	-20.10	AVG	
10	1.2180	51.72	0.14	51.86	56.00	-4.14	QP	
11	1.5820	19.14	0.13	19.27	46.00	-26.73	AVG	
12	27.1460	39.78	0.26	40.04	60.00	-19.96	QP	

Note: Result=Reading+Factor Over Limit=Result-Limit

3. Disturbance Power Test


3.1. Test Standard and Limit

Test Standard	EN IEC 55014-1
---------------	----------------

Disturbance Power Test Limit

Test Limit	Frequency (MHz)	At mains terminals (dB μ V)	
		Quasi-peak Level	Average Level
	30 ~300	45 Increasing Linearly with Frequency to 55	35 Increasing Linearly with Frequency to 45

3.2. Test Setup

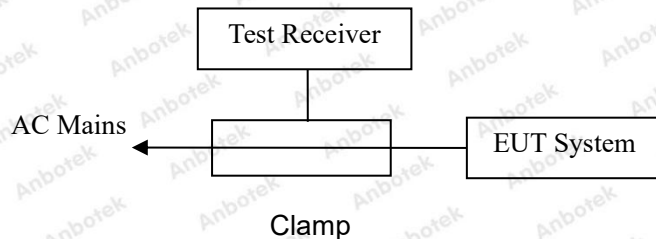

3.3. EUT Configuration on Measurement

The EN IEC 55014-1 Regulations test method must be used to find the maximum emission during disturbance power measurement. The configuration of the EUT is the same as used in conducted emission measurement.

3.4. Operating Condition of EUT

- 3.4.1. Setup the EUT as shown in Section 3.2.
- 3.4.2. Turn on the power of all equipments.
- 3.4.3. Let the EUT work in test mode and measure it.

3.5. Test Procedure

The EUT is placed on the ground and away from other metallic surface at least 0.8m. It is connected to the power mains through an extension cord of 6m min. The absorber clamp clamps the cord and moves from the far end to the EUT to measure the disturbing energy emitted from the cord.

The bandwidth of the test receiver(R&S ESCI) is set at 120kHz.

All the test results are listed in Section 3.6.

3.6. Test Results

PASS


The frequency spectrum from 30MHz to 300MHz is investigated.

The test curves are shown in the following pages.



Power Clamp Test Data

Test Site: 1# Shielded Room
 Test Specification: AC 230V, 50Hz
 Comment: AC LINE
 Temp.: 23.9°C Hum.: 47%

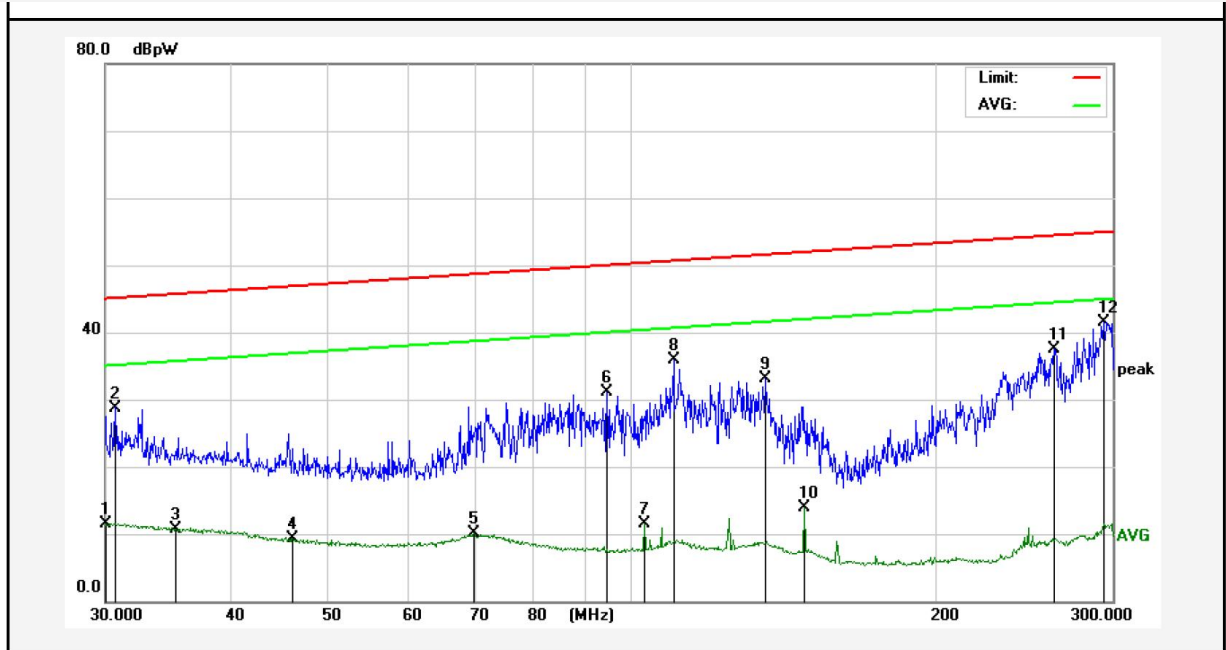

No.	Freq. (MHz)	Reading (dBpW)	Factor (dB)	Result (dBpW)	Limit (dBpW)	Over Limit (dB)	Detector	Remark
1	30.0000	-16.34	27.90	11.56	35.00	-23.44	AVG	
2	30.7200	0.94	27.86	28.80	45.10	-16.30	QP	
3	35.3200	-16.84	27.58	10.74	35.71	-24.97	AVG	
4	46.1200	-16.92	26.21	9.29	36.87	-27.58	AVG	
5	69.8000	-16.45	26.46	10.01	38.67	-28.66	AVG	
6	94.4400	6.96	24.20	31.16	49.98	-18.82	QP	
7	103.0000	-13.11	24.52	11.41	40.36	-28.95	AVG	
8	110.0000	10.82	25.10	35.92	50.64	-14.72	QP	
9	135.7600	8.07	25.09	33.16	51.56	-18.40	QP	
10	148.4800	-9.86	23.83	13.97	41.95	-27.98	AVG	
11	262.8400	14.26	23.16	37.42	54.43	-17.01	QP	
12	294.4000	18.38	23.11	41.49	54.92	-13.43	QP	


Note: Result=Reading+Factor Over Limit=Result-Limit

4. Harmonic Current Emission Test

4.1. Test Standard

Test Standard	EN IEC 61000-3-2
---------------	------------------

4.2. Test Setup

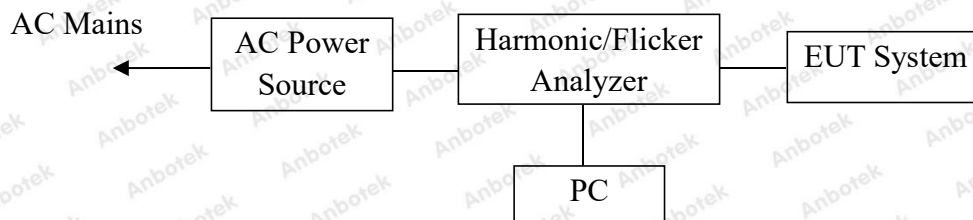

4.3. Operating Condition of EUT


- 4.3.1. Setup the EUT as shown on Section 4.2.
- 4.3.2. Turn on the power of all equipments.
- 4.3.3. After that, let the EUT work in test mode measure it.

4.4. Test Results

PASS

The test curves are shown in the following pages.

Harmonic Current Test Result Summary (Run time)

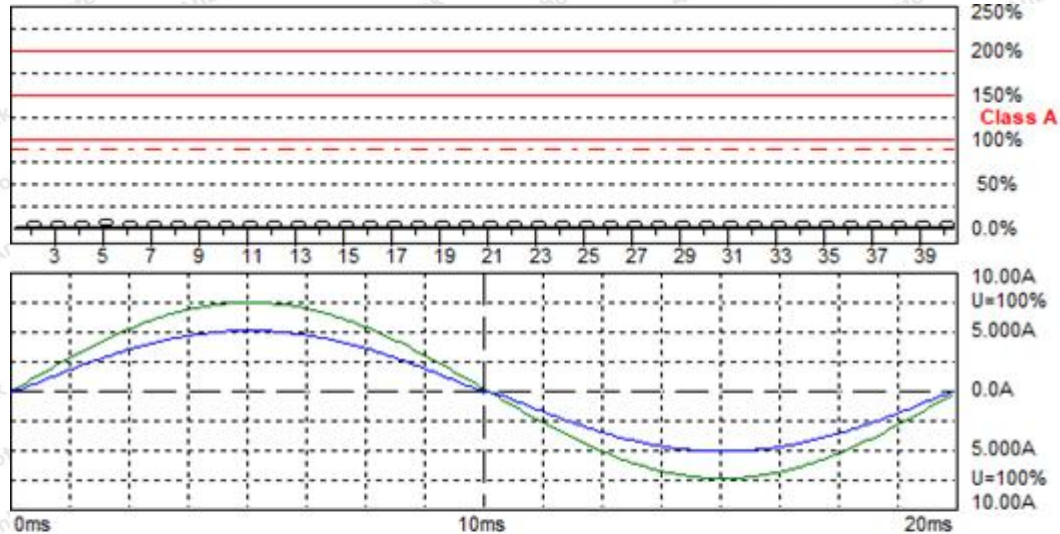

Harmonic Emission - IEC 61000-3-2, EN 61000-3-2, (EN60555-2)

Urms = 229.5 V	P = 818.0 W	THC = 0.074 A	Range: 10 A
Irms = 3.564 A	pf = 1.000		V-nom: 230 V

Test aborted, Result: PASSED

IAR-1000 EMC Partner

Full Bar : Actual Values
Empty Bar : Maximum Values
Blue : Current , Green : Voltage , Red : Failed

Harmonic Current Test Result Summary (Run time)

Urms = 229.5V Freq = 50.000 Range: 10 A
 Irms = 3.564A Ipk = 5.142A cf = 1.442
 P = 818.0W S = 818.1VA pf = 1.000
 THDi = 2.20 % THDu = 0.20 % Class A

Test - Time : 3min (100 %)

Test aborted, Result: PASSED

Order	Freq. Status [Hz]	Iavg [A]	Iavg%L [%]	Irms [A]	Irms% [%]	Irms%L [%]	Imax [A]	Imax%L [%]	Limit [A]
1	50	3.0392		3.4479	96.729		3.4174		
2	100	0.0025	0.2323	0.0031	0.0856	0.2826	0.0226	2.0910	1.0800
3	150	0.0515	2.2409	0.0568	1.5925	2.4679	0.0562	2.4414	2.3000
4	200	0.0000	0.0000	0.0012	0.0342	0.2839	0.0073	1.7033	0.4300
5	250	0.0295	2.5877	0.0323	0.9075	2.8376	0.0323	2.8376	1.1400
6	300	0.0000	0.0000	0.0006	0.0171	0.2035	0.0043	1.4242	0.3000
7	350	0.0122	1.5853	0.0226	0.6336	2.9329	0.0226	2.9329	0.7700
8	400	0.0000	0.0000	0.0006	0.0171	0.2654	0.0031	1.3269	0.2300
9	450	0.0000	0.0000	0.0171	0.4795	4.2725	0.0171	4.2725	0.4000
10	500	0.0000	0.0000	0.0006	0.0171	0.3317	0.0024	1.3269	0.1840
11	550	0.0000	0.0000	0.0134	0.3767	4.0690	0.0128	3.8841	0.3300
12	600	0.0000	0.0000	0.0000	0.0000	0.0000	0.0024	1.5922	0.1533
13	650	0.0000	0.0000	0.0104	0.2911	4.9409	0.0104	4.9409	0.2100
14	700	0.0000	0.0000	0.0006	0.0171	0.4644	0.0018	1.3932	0.1314
15	750	0.0000	0.0000	0.0085	0.2397	5.6966	0.0085	5.6966	0.1500
16	800	0.0000	0.0000	0.0006	0.0171	0.5307	0.0018	1.5922	0.1150
17	850	0.0000	0.0000	0.0067	0.1884	5.0727	0.0067	5.0727	0.1324
18	900	0.0000	0.0000	0.0006	0.0171	0.5971	0.0018	1.7912	0.1022
19	950	0.0000	0.0000	0.0055	0.1541	4.6387	0.0055	4.6387	0.1184
20	1000	0.0000	0.0000	0.0006	0.0171	0.6634	0.0012	1.3269	0.0920
21	1050	0.0000	0.0000	0.0049	0.1370	4.5573	0.0049	4.5573	0.1071
22	1100	0.0000	0.0000	0.0000	0.0000	0.0000	0.0012	1.4595	0.0836
23	1150	0.0000	0.0000	0.0037	0.1027	3.7435	0.0037	3.7435	0.0978
24	1200	0.0000	0.0000	0.0000	0.0000	0.0000	0.0012	1.5922	0.0767
25	1250	0.0000	0.0000	0.0031	0.0856	3.3908	0.0031	3.3908	0.0900
26	1300	0.0000	0.0000	0.0000	0.0000	0.0000	0.0012	1.7249	0.0708
27	1350	0.0000	0.0000	0.0024	0.0685	2.9297	0.0024	2.9297	0.0833
28	1400	0.0000	0.0000	0.0000	0.0000	0.0000	0.0012	1.8576	0.0657
29	1450	0.0000	0.0000	0.0018	0.0514	2.3600	0.0018	2.3600	0.0776
30	1500	0.0000	0.0000	0.0006	0.0171	0.9951	0.0012	1.9903	0.0613
31	1550	0.0000	0.0000	0.0012	0.0342	1.6819	0.0018	2.5228	0.0726
32	1600	0.0000	0.0000	0.0006	0.0171	1.0615	0.0018	3.1844	0.0575
33	1650	0.0000	0.0000	0.0012	0.0342	1.7904	0.0018	2.6855	0.0682
34	1700	0.0000	0.0000	0.0006	0.0171	1.1278	0.0012	2.2556	0.0541
35	1750	0.0000	0.0000	0.0006	0.0171	0.9494	0.0012	1.8989	0.0643
36	1800	0.0000	0.0000	0.0000	0.0000	0.0000	0.0006	1.1942	0.0511
37	1850	0.0000	0.0000	0.0006	0.0171	1.0037	0.0012	2.0074	0.0608
38	1900	0.0000	0.0000	0.0006	0.0171	1.2605	0.0006	1.2605	0.0484
39	1950	0.0000	0.0000	0.0006	0.0171	1.0579	0.0006	1.0579	0.0577
40	2000	0.0000	0.0000	0.0006	0.0171	1.3269	0.0006	1.3269	0.0460




5. Voltage Fluctuations & Flicker Test

5.1. Test Standard

Test Standard	EN 61000-3-3
---------------	--------------

5.2. Test Setup

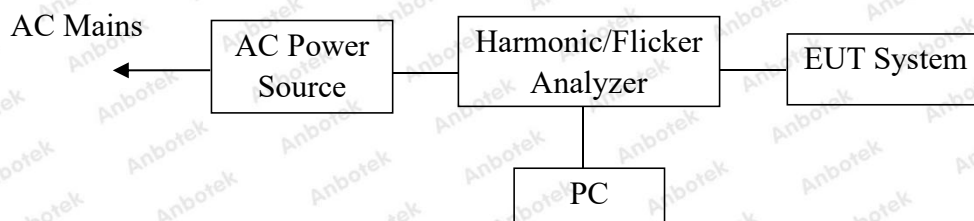

5.3. Operating Condition of EUT

5.3.1. Setup the EUT as shown on Section 5.2.

5.3.2. Turn on the power of all equipments.

5.3.3. After that, let the EUT work in test mode measure it.


5.4. Test Results

PASS

The test curves are shown in the following pages.

Flicker Test Summary (Run time)

Flicker Emission IEC 61000-4-15 for 230V/50Hz

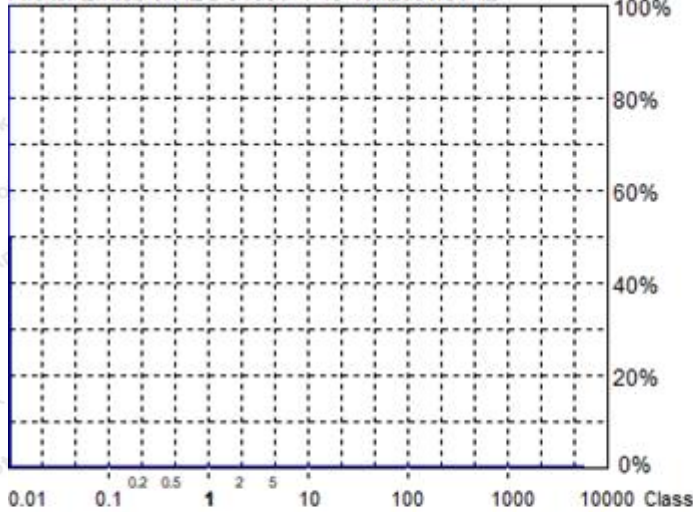

Actual Flicker (Fli):	0.00
Short-term Flicker (Pst):	0.07
Limit (Pst):	1.00
Long-term Flicker (Plt):	0.00
Limit (Plt):	0.65
Maximum Relative Volt. Change (dmax):	0.00%
Limit (dmax):	4.00%
Relative Steady-state Voltage Change (dc):	0.00%
Limit (dc):	3.00%
Tmax 3.00% (dt):	0.00ms
Limit (dt>Lim):	200ms

Flicker Emission - IEC 61000-3-3, EN 61000-3-3

Urms =	228.3 V	P =	814.3 W
Irms =	3.569 A	pf =	0.999

Range: 10 A
V-nom: 230 V

Test aborted, Result: PASSED

IAR-1000 EMC-Partner

- Full Bar** : Actual Values
- Empty Bar** : Maximum Values
- Circles** : Average Values
- Blue** : Current , **Green** : Voltage , **Red** : Failed

Urms =	228.3V	Freq =	50.000	Range:	10 A
Irms =	3.569A	Ipk =	5.151A	cf =	1.443
P =	814.3W	S =	815.0VA	pf =	0.999

Test - Time : 10 x 1min = 10min (100 %)

LIN (Line Impedance Network) : L: 0.24ohm +j0.15ohm N: 0.16ohm +j0.10ohm

Limits :	Plt :	0.65	Pst :	1.00
	dmax :	4.00 %	dc :	3.00 %
	dtLim:	3.00 %	dt>Lim:	200ms

Test aborted, Result: PASSED

	dmax	dc	dt>Lim
	[%]	[%]	[ms]
1	0.000	0.000	0.000

6. Electrostatic Discharge Immunity Test


6.1. Test Standard and Level

Test Standard:	EN IEC 55014-2 (IEC 61000-4-2)
Performance Criterion:	B
Severity Level: 4 / Air Discharge: ± 8 kV, Level: 2 / Contact Discharge: ± 4 kV	

Test Level

Level	Test Voltage Contact Discharge (kV)	Test Voltage Air Discharge (kV)
1.	± 2	± 2
2.	± 4	± 4
3.	± 6	± 8
4.	± 8	± 15
X	Special	Special

6.2. Test Setup

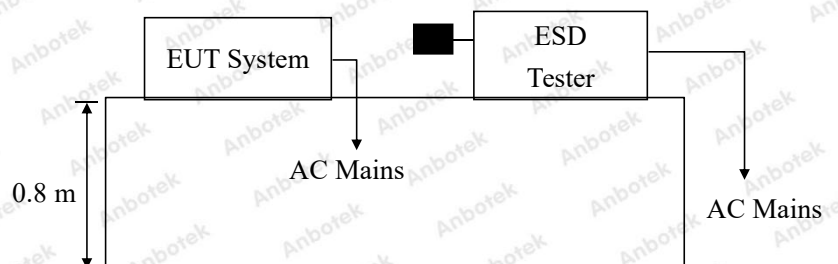

6.3. EUT Configuration on Measurement

The following equipments are installed on Electrostatic Discharge immunity Measurement to meet EN IEC 55014-2 requirements and operating in a manner which tends to maximize its emission characteristics in a normal application.

6.4. Operating Condition of EUT

- 6.4.1. Setup the EUT as shown on Section 6.2.
- 6.4.2. Turn on the power of all equipments.
- 6.4.3. After that, let the EUT work in test mode measure it.

6.5. Test Procedure

6.5.1. Air Discharge:

This test is done on a non-conductive surface. The round discharge tip of the discharge electrode shall be approached as fast as possible to touch the EUT. After each discharge, the discharge electrode shall be removed from the EUT. The generator is then re-triggered for a new single discharge and repeated 10 times for each pre-selected test point. This procedure shall be repeated until all the air discharge completed.

6.5.2. Contact Discharge:

All the procedure shall be same as Section 6.5.1. except that the tip of the discharge electrode shall touch the EUT before the discharge switch is operated.

6.5.3. Indirect discharge for horizontal coupling plane

At least 20 single discharges shall be applied to the horizontal coupling plane, at points on each side of the EUT. The discharge electrode positions vertically at a distance of 0.1m from the EUT and with the discharge electrode touching the coupling plane.

6.5.4. Indirect discharge for vertical coupling plane

At least 20 single discharge shall be applied to the center of one vertical edge of the coupling plane. The coupling plane, of dimensions 0.5m × 0.5m, is placed parallel to, and positioned at a distance of 0.1m from the EUT. Discharges shall be applied to the coupling plane, with this plane in sufficient different positions that the four faces of the EUT are completely illuminated.

6.6. Test Results

PASS

Please refer to the following page.



Electrostatic Discharge Test Results

Air discharge :	±8.0kV	Temperature :	24.9℃
Contact discharge :	±4.0kV	Humidity :	53%
Power Supply :	AC 230V, 50Hz	Expert conclusion :	A
Number of discharge :	10	Test Result:	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail
Location		Kind A-Air Discharge C-Contact Discharge	Result
Button	4 points	A	<input checked="" type="checkbox"/> A <input type="checkbox"/> B <input type="checkbox"/> C <input type="checkbox"/> D
Light	4 points	A	<input checked="" type="checkbox"/> A <input type="checkbox"/> B <input type="checkbox"/> C <input type="checkbox"/> D
Slot	4 points	A	<input checked="" type="checkbox"/> A <input type="checkbox"/> B <input type="checkbox"/> C <input type="checkbox"/> D
HCP	4 points	C	<input checked="" type="checkbox"/> A <input type="checkbox"/> B <input type="checkbox"/> C <input type="checkbox"/> D
VCP of the front	4 points	C	<input checked="" type="checkbox"/> A <input type="checkbox"/> B <input type="checkbox"/> C <input type="checkbox"/> D
VCP of the rear	4 points	C	<input checked="" type="checkbox"/> A <input type="checkbox"/> B <input type="checkbox"/> C <input type="checkbox"/> D
VCP of the left	4 points	C	<input checked="" type="checkbox"/> A <input type="checkbox"/> B <input type="checkbox"/> C <input type="checkbox"/> D
VCP of the right	4 points	C	<input checked="" type="checkbox"/> A <input type="checkbox"/> B <input type="checkbox"/> C <input type="checkbox"/> D
<p>Remark: Discharge should be considered on Contact and Air and Horizontal Coupling Plane (HCP) and Vertical Coupling Plane (VCP).</p>			



7. Electrical Fast Transient/Burst Immunity Test


7.1. Test Standard and Level

Test Standard:	EN IEC 55014-2 (IEC 61000-4-4)
Performance criterion:	B
Severity Level 2: 1.00kV	

Test Level

Open Circuit Output Test Voltage $\pm 10\%$		
Level	On Power Supply Lines	On I/O (Input/Output) Signal data and control lines
1.	0.50 kV	0.25 kV
2.	1.00 kV	0.50 kV
3.	2.00 kV	1.00 kV
4.	4.00 kV	2.00 kV
X.	Special	Special

7.2. Test Setup

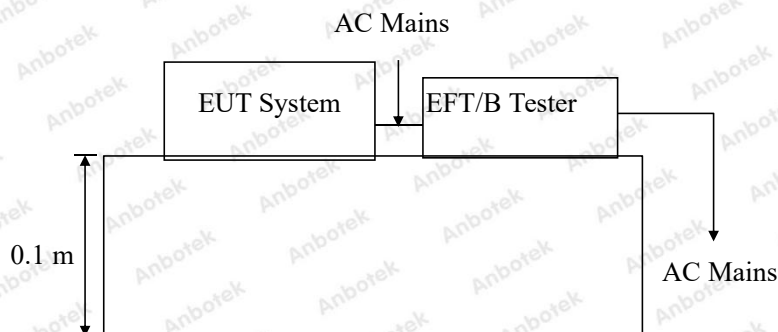

7.3. EUT Configuration on Measurement

The following equipments are installed on Electrical Fast Transient/Burst Immunity Measurement to meet EN IEC 55014-2 requirements and operating in a manner which tends to maximize its emission characteristics in a normal application.

7.4. Operating Condition of EUT

7.4.1. Setup the EUT as shown in Section 7.2.

7.4.2. Turn on the power of all equipments.

7.4.3. Let the EUT work in test mode and measure it.

7.5. Test Procedure

The EUT is put on the table which is 0.1 meter high above the ground. This reference ground plane shall project beyond the EUT by at least 0.1m on all sides and the minimum distance between EUT and all other conductive structure, except the ground plane beneath the EUT, shall be more than 0.5m.

7.5.1. For input and output AC power ports:

The EUT is connected to the power mains by using a coupling device which couples the EFT interference signal to AC power lines. Both polarities of the test voltage should be applied during compliance test and the duration of the test is 2 mins.

7.5.2. For signal lines and control lines ports:

Select tests based on product characteristics.

7.5.3. For DC output line ports:

Select tests based on product characteristics.

7.6. Test Results

PASS

Please refer to the following page.



Electrical Fast Transient/Burst Test Results

Ambient Condition : 24.9°C / 53% RH		Expert conclusion : A	
Power Supply .: AC 230V, 50Hz		Test Result : <input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail	
Inject Line : AC Mains		Inject Method: Direct	Inject Time(s): 120
Line	Polarity	Test Voltage (kV)	Result
AC Line	±	1.00kV	<input checked="" type="checkbox"/> A <input type="checkbox"/> B <input type="checkbox"/> C <input type="checkbox"/> D
DC Line			
Signal Line			



8. Surge Immunity Test


8.1. Test Standard and Level

Test Standard:	EN IEC 55014-2 (IEC 61000-4-5)
Performance criterion:	B
Severity Level 2, Line to Line: 1.0kV	

Test Level

Severity Level	Open-Circuit Test Voltage (kV)
1.	0.5
2.	1.0
3.	2.0
4.	4.0
X.	Special

8.2. Test Setup

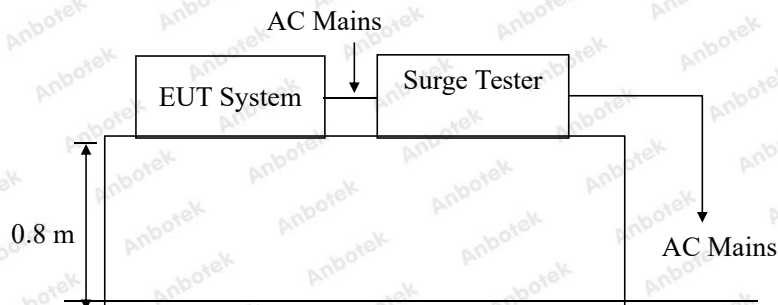

8.3. EUT Configuration on Measurement

The following equipments are installed on Surge immunity Measurement to meet EN IEC 55014-2 requirements and operating in a manner which tends to maximize its emission characteristics in a normal application.

8.4. Operating Condition of EUT

- 8.4.1. Setup the EUT as shown in Section 8.2.
- 8.4.2. Turn on the power of all equipments.
- 8.4.3. Let the EUT work in test mode and measure it.

8.5. Test Procedure

8.5.1. Set up the EUT and test generator as shown on Section 8.2.

8.5.2. For line to line coupling mode, provide a 1.0kV 1.2/50us voltage surge (at open-circuit condition) and 8/20us current surge to EUT selected points.

8.5.3. At least 5 positive and 5 negative (polarity) tests with a maximum 1/min repetition rate are conducted during test.

8.5.4. Different phase angles are done individually.

8.5.5. Record the EUT operating situation during compliance test and decide the EUT immunity criterion for above each test.

8.6. Test Results

PASS

Please refer to the following page.



Surge Immunity Test Results

Humidity :	53%		Temperature :	24.9°C	
Power Supply :	AC 230V, 50Hz		Expert conclusion:	A	
Test Result :	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail				
Location	Polarity	Phase Angle	Number of Pulse	Pulse Voltage (kV)	Result
L-N	+	<input type="checkbox"/> 0° <input checked="" type="checkbox"/> 90° <input type="checkbox"/> 180° <input type="checkbox"/> 270°	5	1.0kV	<input checked="" type="checkbox"/> A <input type="checkbox"/> B <input type="checkbox"/> C <input type="checkbox"/> D
L-N	-	<input type="checkbox"/> 0° <input type="checkbox"/> 90° <input type="checkbox"/> 180° <input checked="" type="checkbox"/> 270°	5	1.0kV	<input checked="" type="checkbox"/> A <input type="checkbox"/> B <input type="checkbox"/> C <input type="checkbox"/> D
L-GND					
L-GND					
N-GND					
N-GND					



9. Injected Currents Susceptibility Test


9.1. Test Standard and Level

Test Standard	EN IEC 55014-2 (IEC 61000-4-6)
Performance criterion	A
Severity Level 2: 3V (rms), (0.15MHz ~230MHz)	

Test Level

Level	Field Strength V
1.	1
2.	3
3.	10
X.	Special

9.2. Test Setup

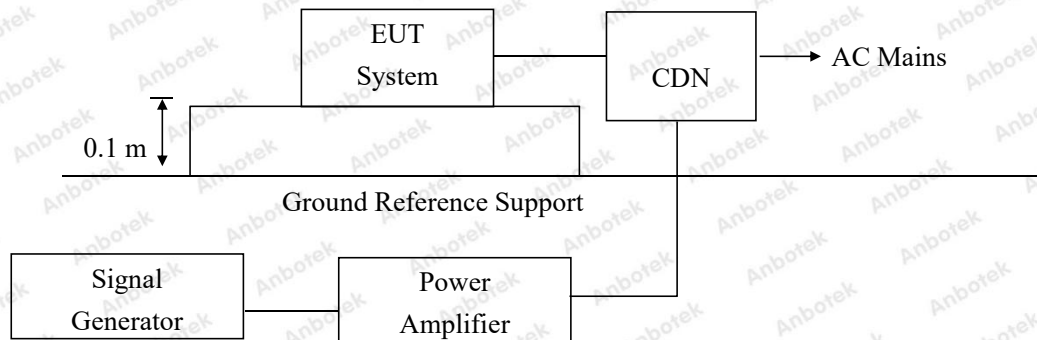

9.3. EUT Configuration

The following equipments are installed on currents susceptibility Measurement to meet EN IEC 55014-2 requirements and operating in a manner which tends to maximize its emission characteristics in a normal application.

9.4. Operating Condition of EUT

- 9.4.1. Setup the EUT as shown in Section 9.2.
- 9.4.2. Turn on the power of all equipments.
- 9.4.3. Let the EUT work in test mode and measure it.

9.5. Test Procedure

- 1) Set up the EUT, CDN and test generators as shown on Section 9.2.
- 2) Let the EUT work in test mode and measure it.
- 3) The EUT are placed on an insulating support 0.1m high above a ground reference plane. CDN (coupling and decoupling device) is placed on the ground plane about 0.3m from EUT. Cables between CDN and EUT are as short as possible, and their height above the ground reference plane shall be between 30 and 50 mm (where possible).
- 4) The disturbance signal described below is injected to EUT through CDN.
- 5) The EUT operates within its operational mode(s) under intended climatic conditions after power on.
- 6) The frequency range is swept from 150KHz to 230MHz using 3V signal level, and with the disturbance signal 80% amplitude modulated with a 1KHz sine wave.
- 7) The rate of sweep shall not exceed $1.5 \cdot 10^{-3}$ decades/s. Where the frequency is swept incrementally, the step size shall not exceed 1% of the start and thereafter 1% of the preceding frequency value.
- 8) Recording the EUT operating situation during compliance testing and decide the EUT immunity criterion.

9.5.1. For signal lines and control lines ports:

Select tests based on product characteristics.

9.5.2. For DC output line ports:

Select tests based on product characteristics.

9.6. Test Results

PASS

Please refer to the following page.



Injected Currents Susceptibility Test Results

Humidity : 52%		Temperature : 24.6°C	
Power Supply : AC 230V, 50Hz		Expert conclusion: A	
Test Result : <input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail			
Frequency Range (MHz)		Injected Position	
0.15 ~ 230		AC Mains	
		Strength (Unmodulated)	
		3V	
		Result	
		<input checked="" type="checkbox"/> A <input type="checkbox"/> B	
		<input type="checkbox"/> C <input type="checkbox"/> D	
Remark : 1. Modulation Signal:1KHz 80% AM			




10. Voltage Dips And Interruptions Test

10.1. Test Standard and Level

Test Standard:	EN IEC 55014-2 (IEC 61000-4-11)
Performance Criterion:	C

Test Level		
Test Level %UT	Voltage dip and short interruptions %UT	Duration (in period)
0	100	0.5
40	60	1
70	30	5
/	/	10
		25
		50
		*

10.2. Test Setup

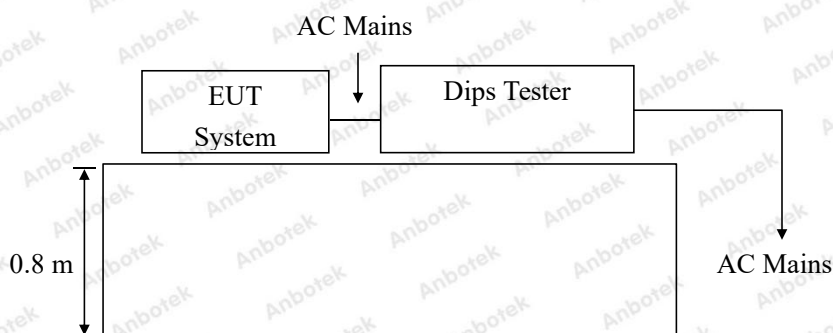

10.3. EUT Configuration on Measurement

The following equipments are installed on Voltage dips and interruptions Measurement to meet EN IEC 55014-2 requirements and operating in a manner which tends to maximize its emission characteristics in a normal application.

10.4. Operating Condition of EUT

- 10.4.1. Setup the EUT as shown in Section 10.2.
- 10.4.2. Turn on the power of all equipments.
- 10.4.3. Let the EUT work in test mode and measure it.

10.5. Test Procedure

- 1) Set up the EUT and test generator as shown on Section 10.2.
- 2) The interruptions is introduced at selected phase angles with specified duration.
- 3) Record any degradation of performance.

10.6. Test Results

PASS

Please refer to the following page.



Voltage Dips and Interruptions Test Results

Temperature : 24.9°C		Humidity : 53%	
Power Supply : AC 230V, 50Hz		Expert conclusion : C	
Test Result : <input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail			
Test Level % UT	Voltage Dips & Short Interruptions % UT	Duration (in periods)	Result
0	100	0.5P	<input type="checkbox"/> A <input type="checkbox"/> B <input checked="" type="checkbox"/> C <input type="checkbox"/> D
40	60	10P	<input type="checkbox"/> A <input type="checkbox"/> B <input checked="" type="checkbox"/> C <input type="checkbox"/> D
70	30	25P	<input type="checkbox"/> A <input type="checkbox"/> B <input checked="" type="checkbox"/> C <input type="checkbox"/> D
Test Level % UT	Voltage Dips & Short Interruptions % UT	Duration (in periods)	Result

APPENDIX I -- TEST SETUP PHOTOGRAPH

Photo of Power Line Conducted Emission Test

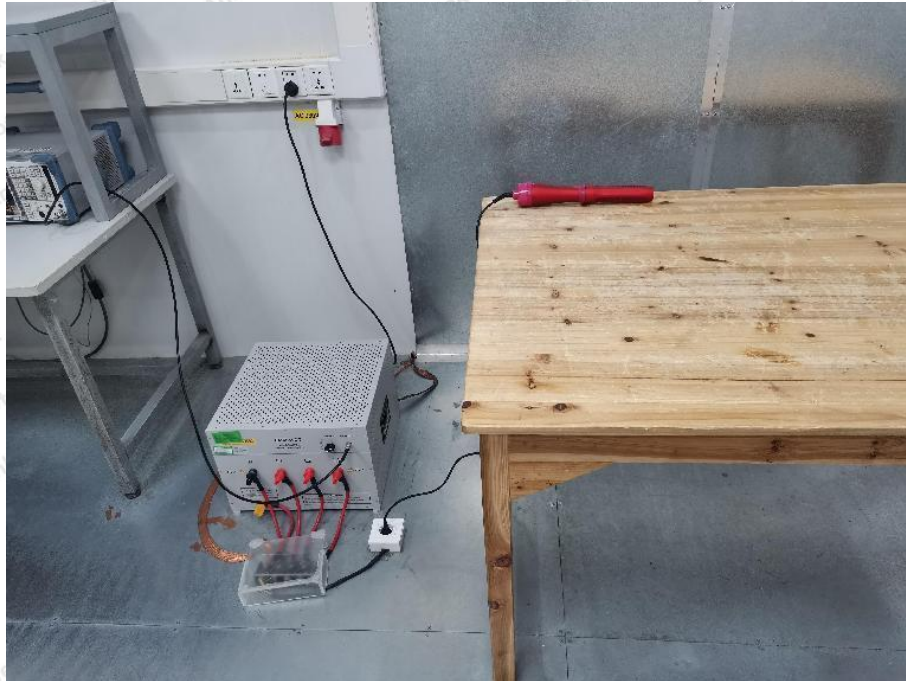


Photo of Disturbance Power Test



Photo of Flicker/ Harmonic Test



Photo of Electrostatic Discharge Immunity Test

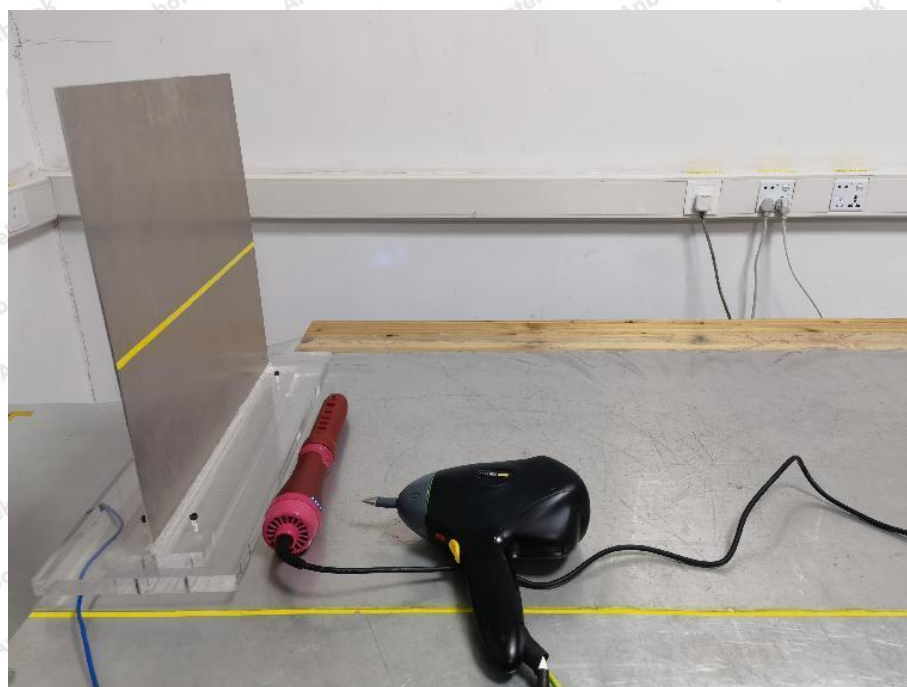


Photo of Electrical Fast Transient/Burst Immunity Test




Photo of Surge Immunity Test



Photo of Injected currents susceptibility Test





Photo of Voltage Dips and Interruptions Test

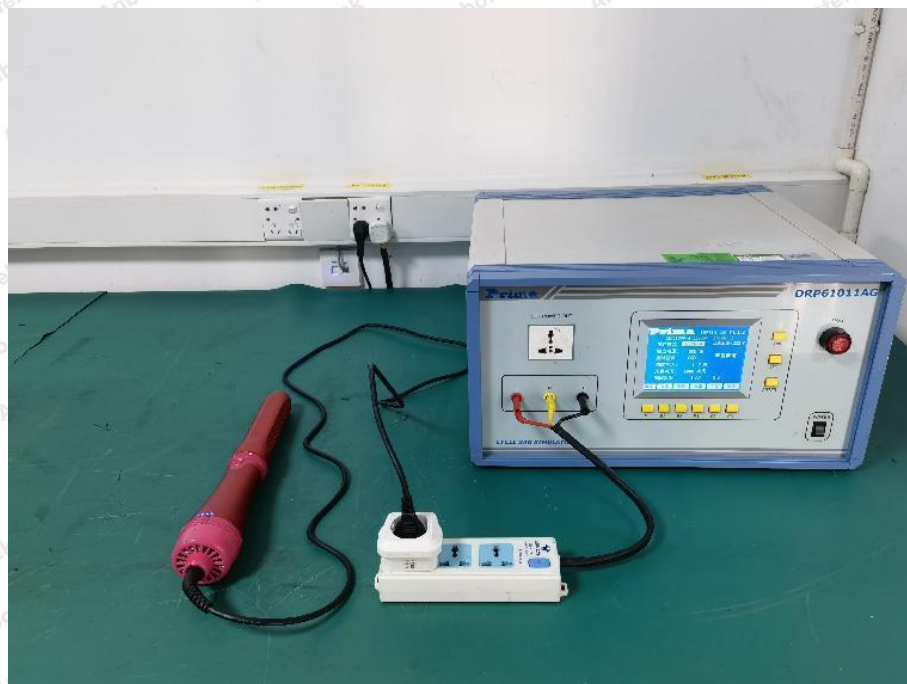

APPENDIX II -- Photo documentation





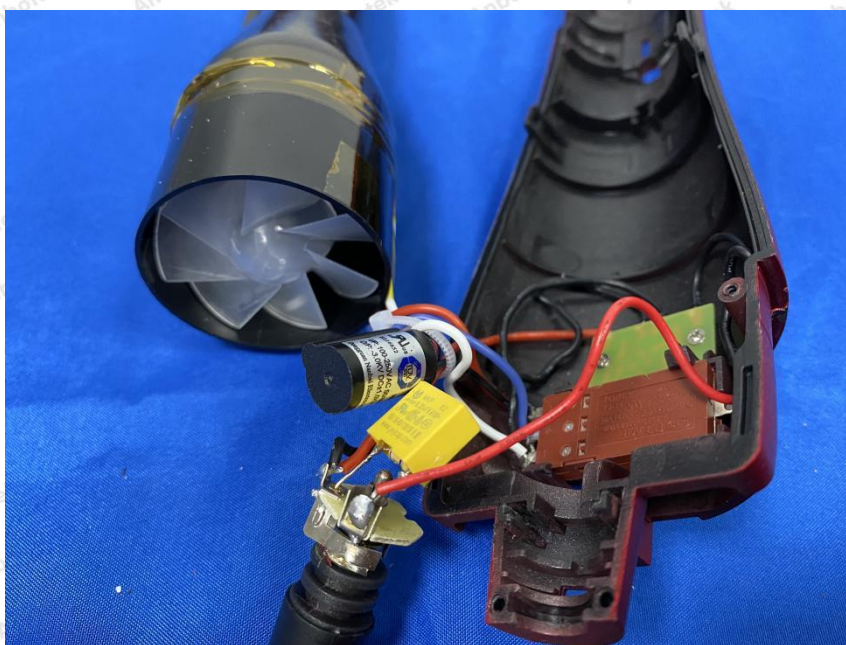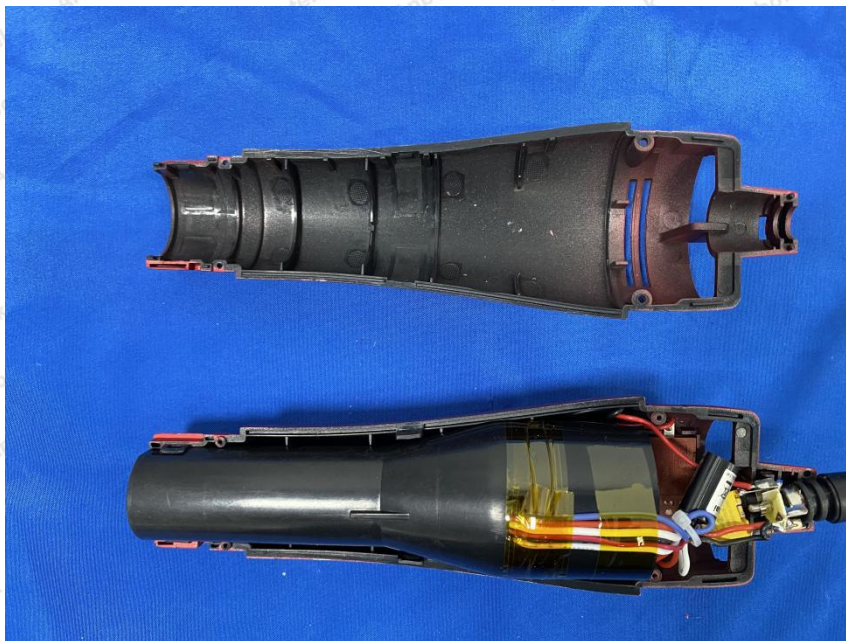

CE Label

1. The CE conformity marking must consist of the initials 'CE' taking the following form:

If the CE marking is reduced or enlarged, the proportions given in the above graduated drawing must be respected.

2. The CE marking must have a height of at least 5 mm except where this is not possible on account of the nature of the apparatus.

3. The CE marking must be affixed to the product or to its data plate. Additionally it must be affixed to the packaging, if any, and to the accompanying documents.

4. The CE marking must be affixed visibly, legibly and indelibly.

It must have the same height as the initials 'CE'.

----- End of Report -----